

Underlay pipe feedthrough



The feed through ensures that penetration of the under roof is solved correctly, while making the work of the craftsman much faster and easier.

Under roof pipe through


- Used for penetration of underlay through all kinds of underlays at a max of 200 × 200 mm.
- Waterproof penetration of the underlay.
- Secure and efficient installation



Kima Roof Accesories ApS

Grindsted Landevej 69, Eg, 7200 Grindsted, Denmark tel: +45 7533 0800

Email: mail@kimarroof.dk webpage: www.kimarroof.dk

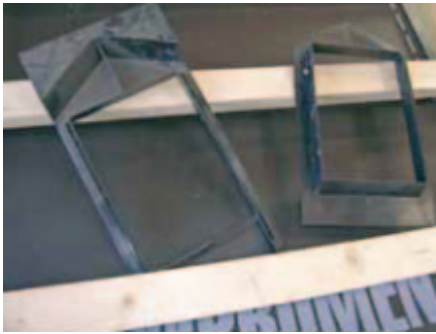


Take the two elements apart



The top element is installed between the rafter and the underlay



The snip is attached with the nails that are included in the package

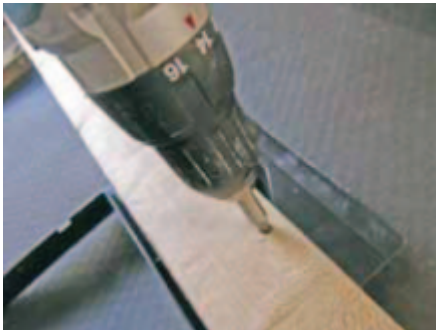

2 screws are screwed. max. 45 mm long screws through the joint and down the top of the underlay collar. The ribs on the underside of the collar ensure that there is no contact between the underlays and screws.



Two diagonal cuts are made from each corner.



The lower element is inserted through the hole, clicked firmly and screwed into the screw holes with the supplied 35 mm. screws.



The Underlay collar from the inside.



Iso tubes are inserted through the pipe passage. To close air flows around the iso tube, foam can be foamed or filled with traditional insulation.



The underlay collar is fully assembled from the outside.

Technical data

Material	PPC
UV-resistant	Yes
Colour	Black
Number per box	20 pcs.